


# Jennings vacuum fixed capacitors

# 1000pF


JENNINGS Model Number	Capacity (pF) ± 5%	Voltage (kV) Peak		Current Amps (RMS) Max.	Type Ceramic or Glass	Nominal Dimensions				Weight (Nominal)
		Test	Working			Inches		Millimeters		
						Length	Diam.	Length	Diam.	
CFHP-1000-40S	1000	40	24	330	C	6.20	7.20	157.48	182.88	13 lb.
CFHP-1000-45S	1000	45	27	340	C	6.20	7.20	157.48	182.88	13 lb.
CFHP-1000-50S	1000	50	30	350	C	6.20	7.20	157.48	182.88	13 lb.
JCSL-1000-3S	1000	3.0	1.8	60	G	3.50	2.88	88.90	73.15	13 oz.
JCSL-1000-5S	1000	5.0	3.0	65	G	3.50	2.88	88.90	73.15	13 oz.
CFED-1000-10S	1000	10	6.0	150	C	3.81	4.56	96.77	115.82	5 lb. 13 oz.
CFED-1000-15S	1000	15	9.0	155	C	3.81	4.56	96.77	115.82	5 lb. 13 oz.
CFED-1000-20S	1000	20	12	160	C	3.81	4.56	96.77	115.82	5 lb. 13 oz.
CFED-1000-25S	1000	25	15	180	C	3.81	4.56	96.77	115.82	5 lb. 13 oz.

## CFHP 1000




Mounting: Both ends have tapped holes.

CONTINUOUS RMS AMPERES vs FREQUENCY (at 30kV PEAK WORKING VOLTAGE)

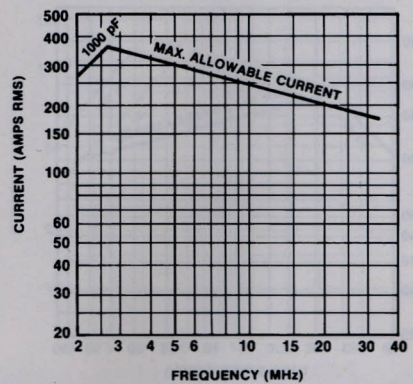


## JCSL 1000




Mounting: Use Jennings No. 112304 Fuse clip. Or flange FMOB.

CONTINUOUS RMS AMPERES vs FREQUENCY (at 3kV PEAK WORKING VOLTAGE)

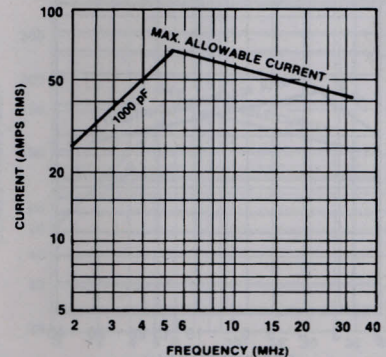

## CFED 1000



Mounting: Both ends have tapped holes.

CONTINUOUS RMS AMPERES vs FREQUENCY (at 15kV PEAK WORKING VOLTAGE)

