



16L0029W

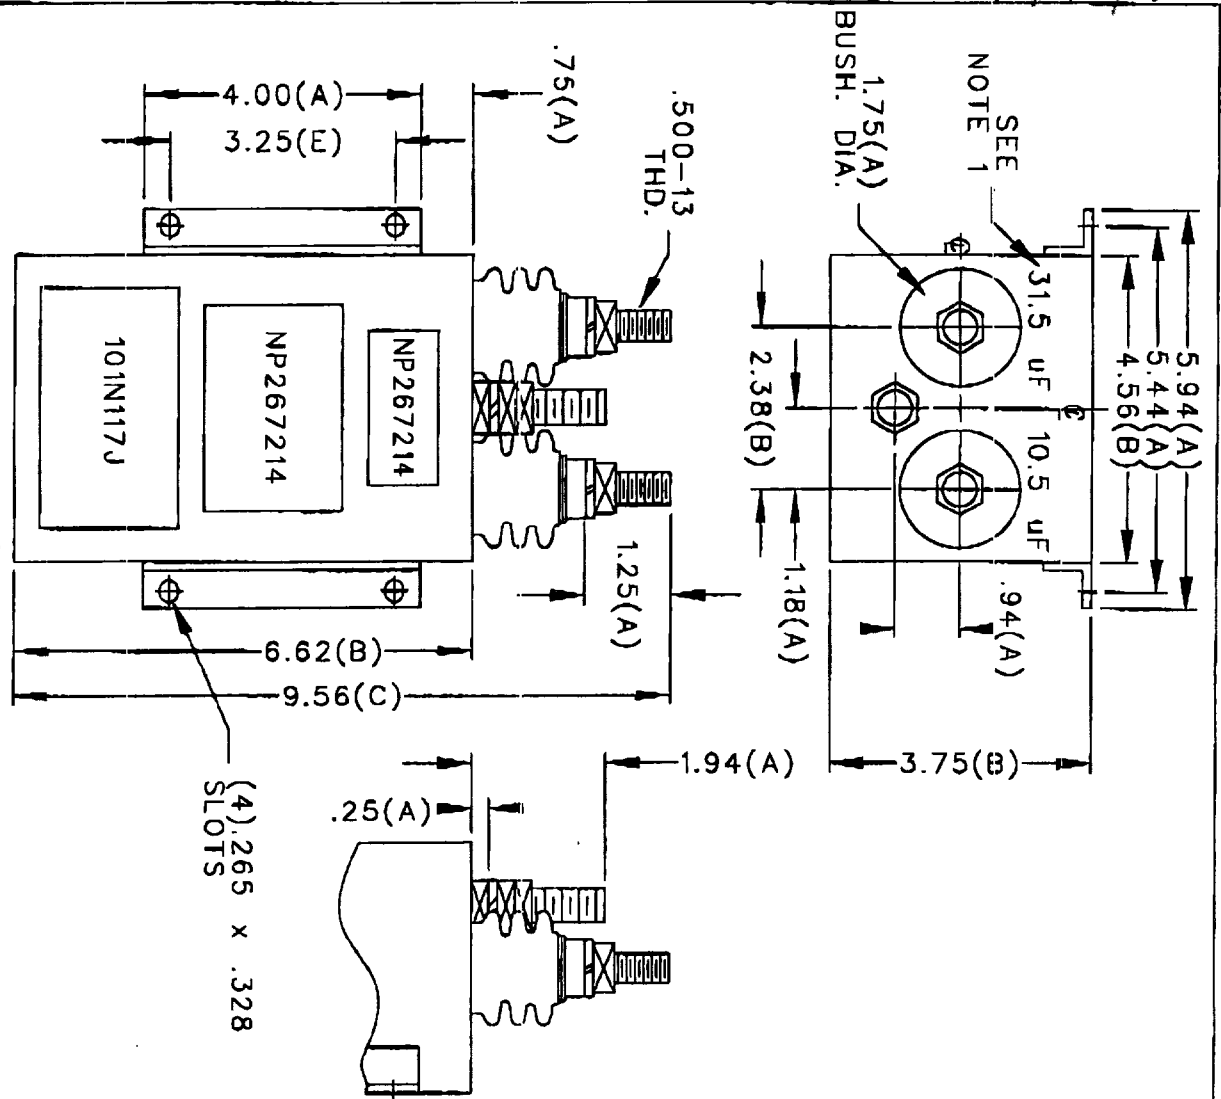

TOL +/-
A .06
B .12
C .18
D .25
E .02

NOTE 1 - INK STAMP UF VALUES.

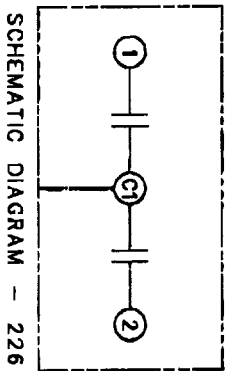

TERM	UF	KVAR	VOLTS	KHZ
1	31.5	11.1	75	10
2	10.5	14.8	150	10

NO INTERNAL DISCH. RESISTORS  
 CAT. 16L0029WH3 SN  
 14.8KVAR 150V 10KHz 1PH  
 11.1KVAR 75V 10KHz 1PH  
 .22 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING  
 OR OPERATING READ GEH-2743  
 NP267214

SIZE	DWG NO.	SH	REV
A	16L0029WH3	2	
REV	DATE		

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS  
 NP267192A

ISSUED  
 DRAWN E. MCGINN  
 AUG. 10, 2000  
 CAPACITOR & POWER PROTECTION  
 FORT EDWARD, N.Y., U.S.A.

SCALE  
 A

SHEET 2  
 CONT. ON  
 OUTLINE  
 16L0029WH3