


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

BUSH. DIA.
1.75(B)

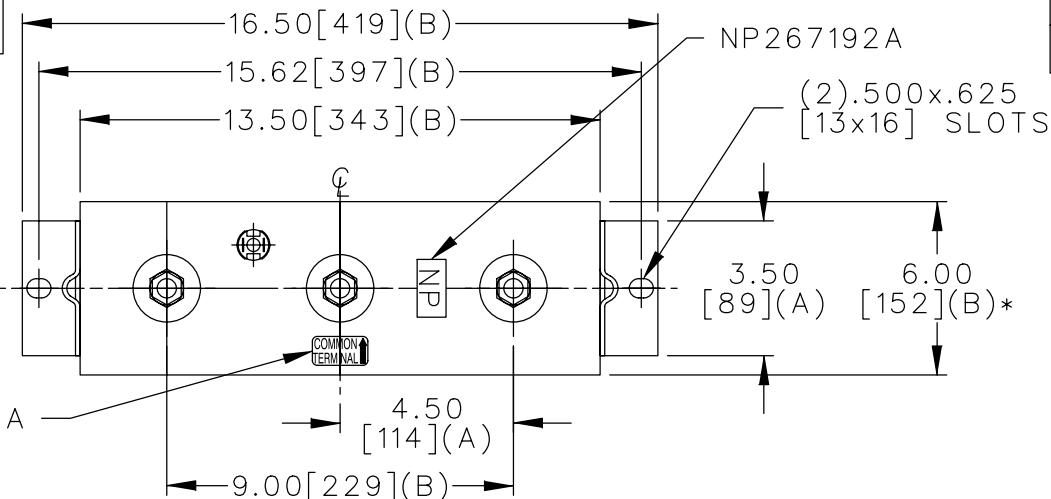

PRESS.SW.
12 PSIG N.C.

.500-13 THD.

10.18
[259]
(B)

101N117J

101N101

1.66[42](A)

24.00
[610]
(B)

26.94
[684]
(D)

UNPAINTED AREA
UNDER BOTH
BRACKETS FOR
GROUNDING


* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

SIZE	DWG NO.	SH	REV
A	16L0031WH4		
REV 3	8-18-99		
4	McGINN CHG LOC 101N171		

TERM	uF	kVAR
1	552.6	75
2	552.6	75

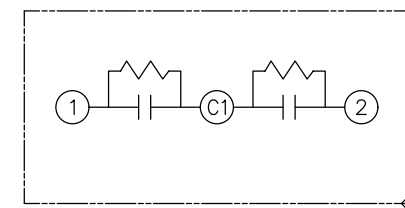

SCHEMATIC DIAGRAM - 227

84Q4D4
600V 1 PH
150KVAR 60Hz KVBIL
CAT. 16L0031WH4
2.35 GAL.
MFG DATE
101N171 READ GEH-2743

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 16L0031WH4	
	DRAWN E.McGINN	NOV. 22, 1996			
ISSUED	12-4-96	SCALE		SHEET 2	CONT. 3

DISTR TO