
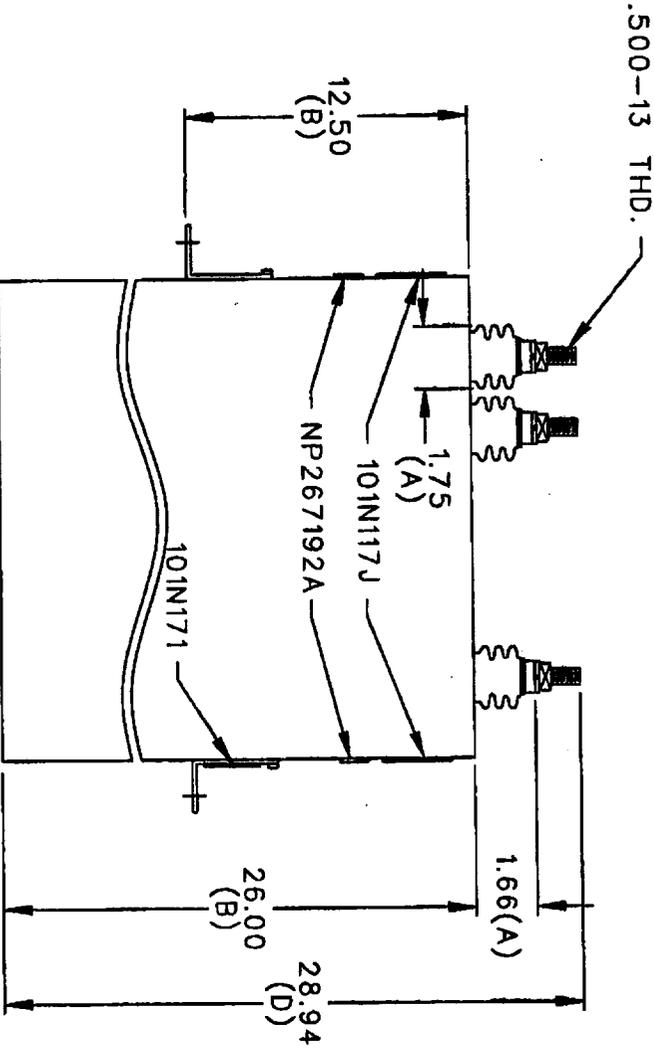



16L0433W

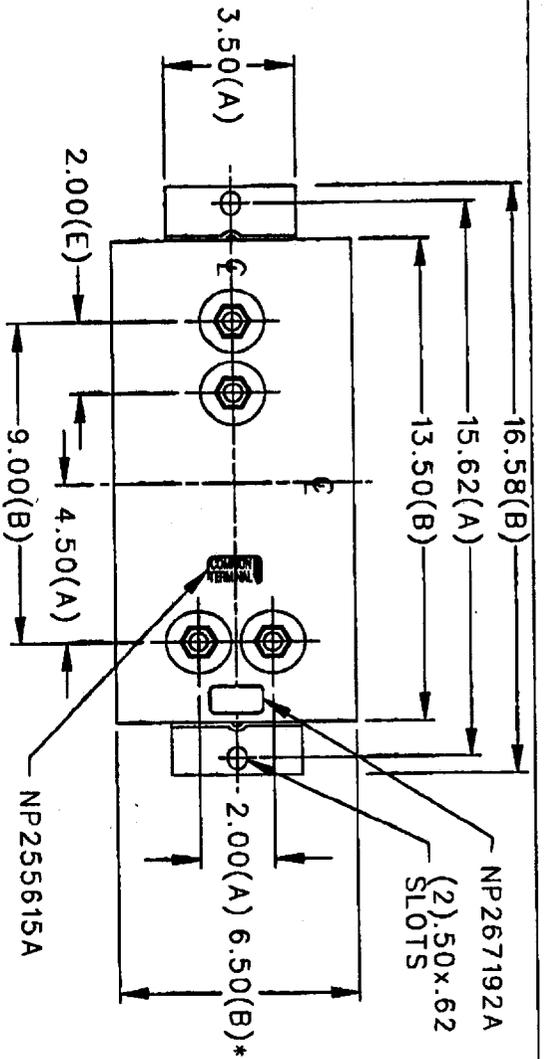

* UP TO +.50 CASE BULGE

TOL	+/-
A	.06
B	.12
C	.18
D	.25
E	.03

TERM	UF	KVAR
1	617.6	128
2	617.6	128

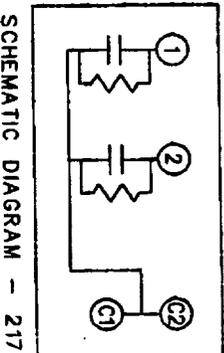

SCHEMATIC DIAGRAM - 217

GE 740 V 1 PH KVBIL
 255 KVAR 60 HZ
 CAT. 16L0433WH3 SN
 3.1 GALS. GEH-2743
 101N171

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS
 NP267192A



CAPACITOR & POWER PROTECTION
 FORT EDWARD, N.Y., U.S.A.

DRAWN E. MCGINN SEPT. 28, 1999

ISSUED 9.29.99

SIZE A

FSCM NO

OUTLINE
 16L0433WH3

SHEET 2 OF 3

SIZE	DWG NO.	SH	REV
A	16L0433WH3	2	
REV			

DISTR TO