



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

SIZE A	DWG NO 19L0025WH4	SHT 2	REV 1
REV 1	DESCRIPTION UPDATE CAT NO.	DATE 5/8/02	APPROVED B.ROSS

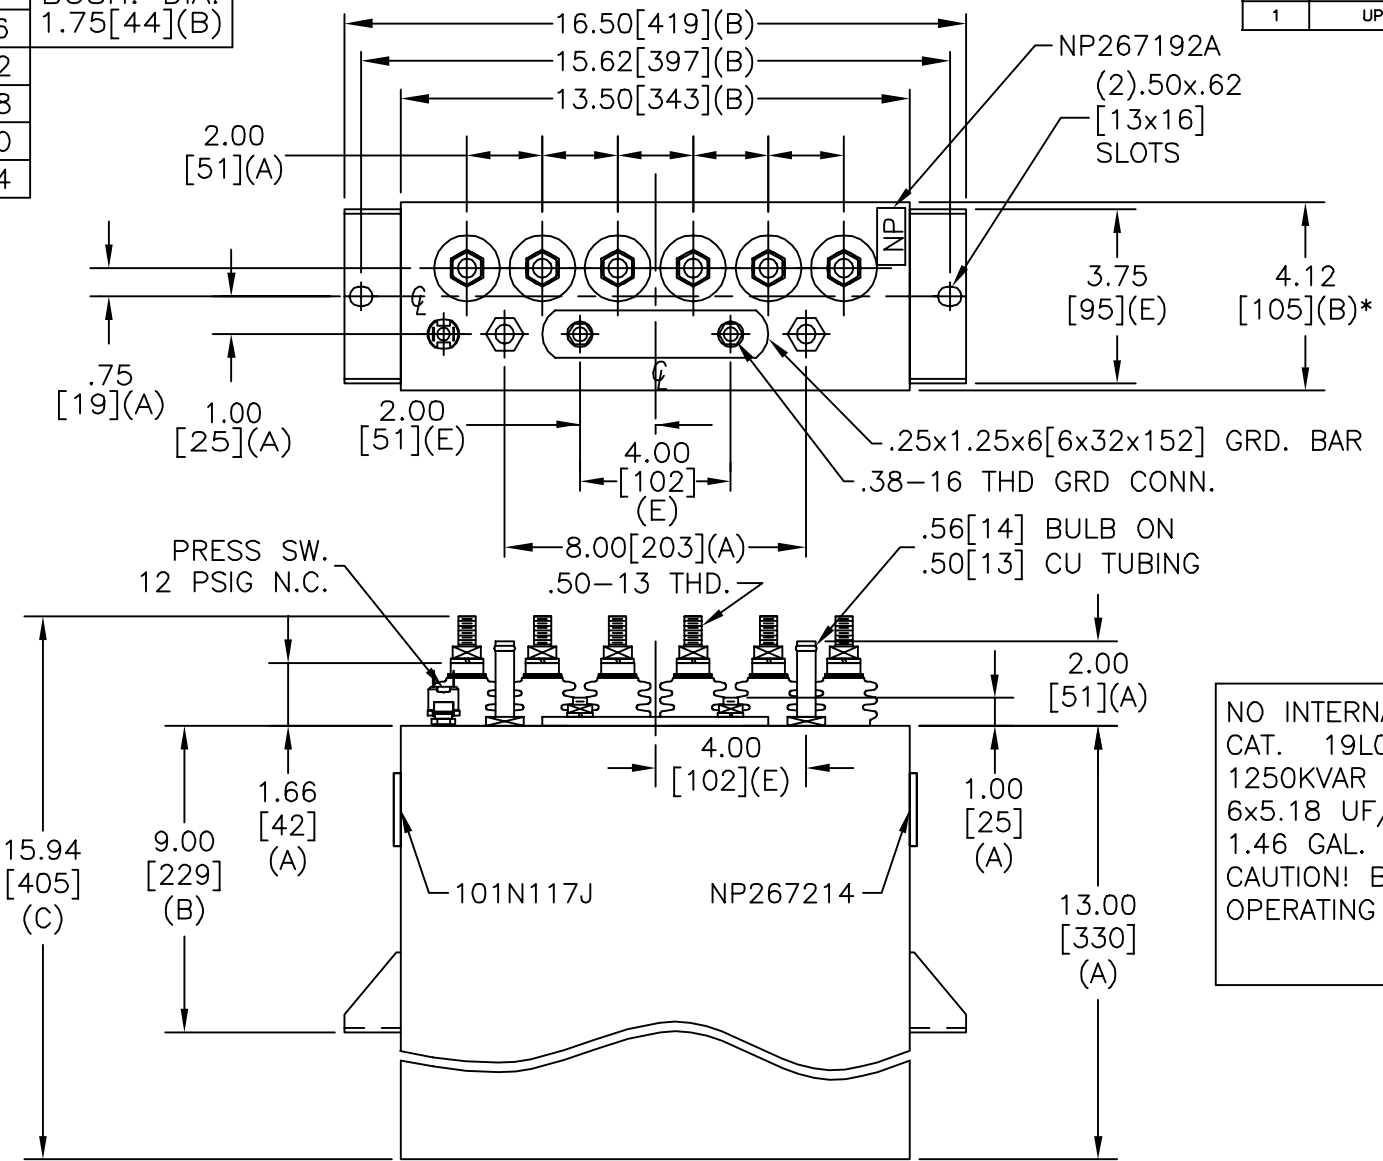

TERM	uF	kVAR
1	5.18	208.3
2	5.18	208.3
3	5.18	208.3
4	5.18	208.3
5	5.18	208.3
6	5.18	208.3

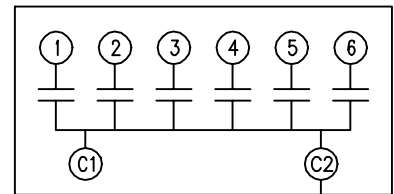

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0025WH4 SN
 1250KVAR 800V 10000HZ 1PH
 6x5.18 UF/TAP
 1.46 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

INDUSTRIAL SYSTEMS FORT EDWARD, N.Y., U.S.A.	SIZE	A
	DRAWN E. McGinn	
ISSUED	DATE 3-25-98	SCALE

<h1>OUTLINE</h1> <h2>19L0025WH4</h2>	
SHEET 2	CONT ON -

DISTR. TO