



TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

BUSH. DIA.
1.75[44](B)

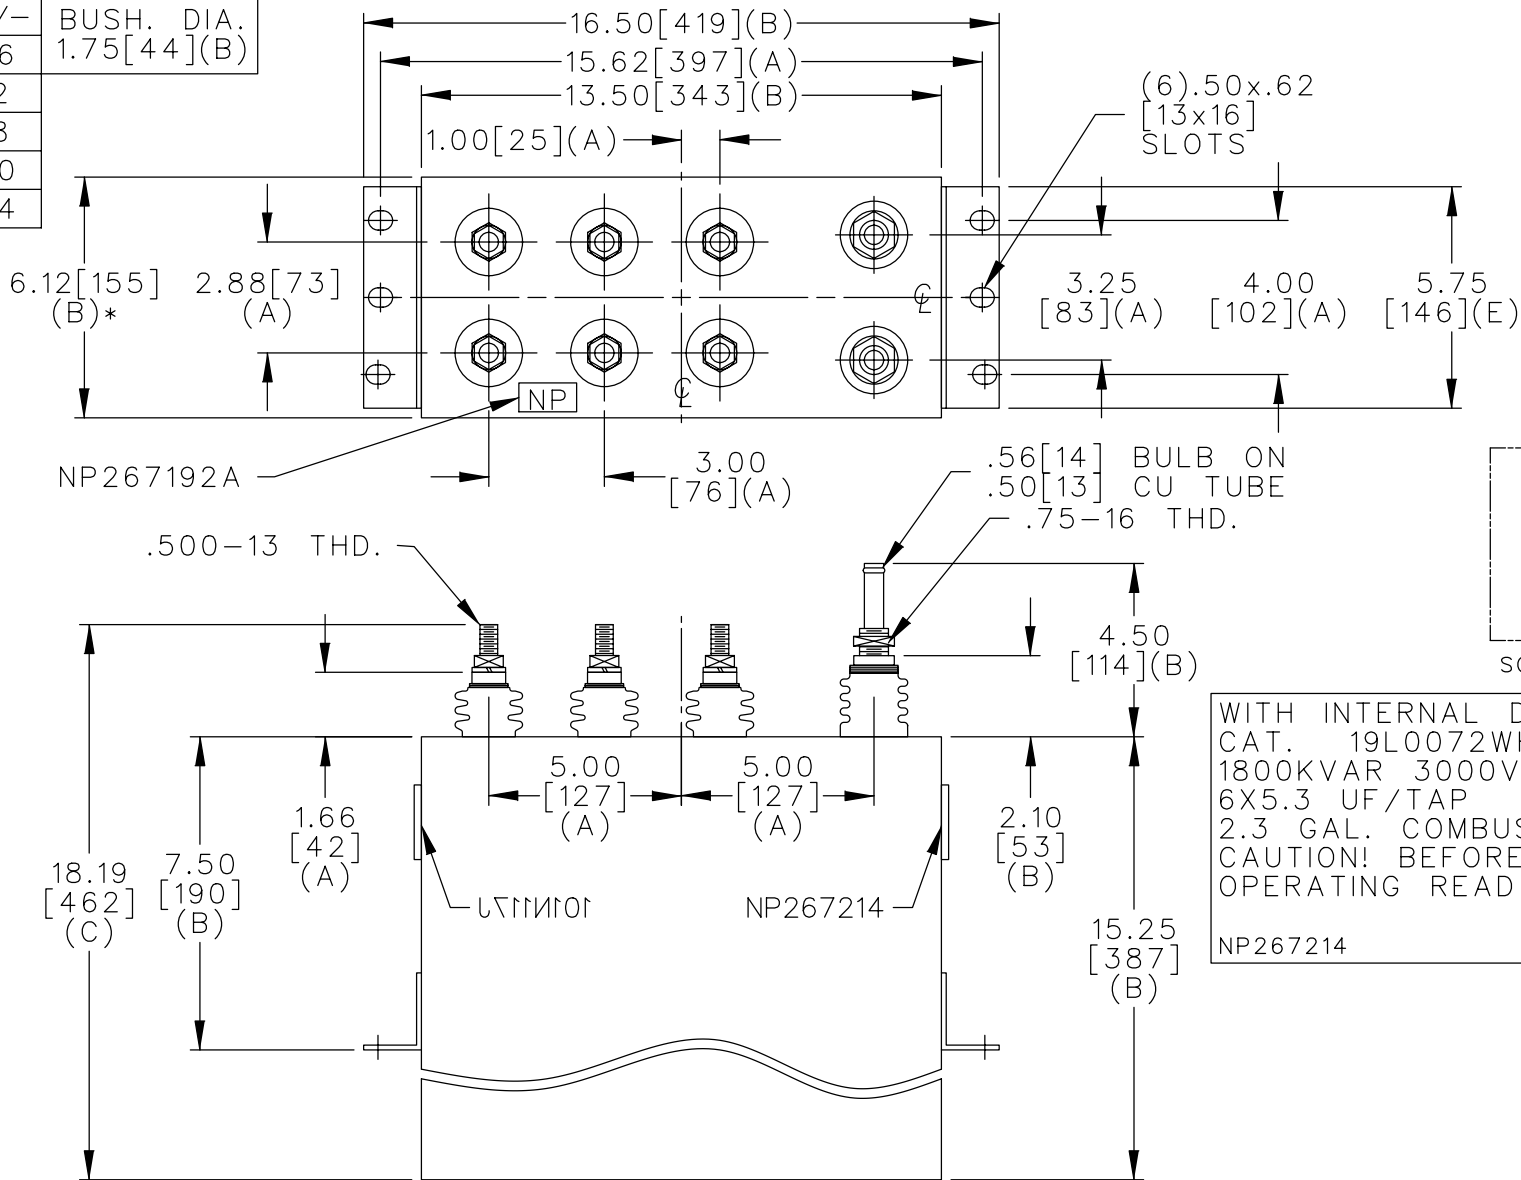

TERM	KVAR
1	300
2	300
3	300
4	300
5	300
6	300

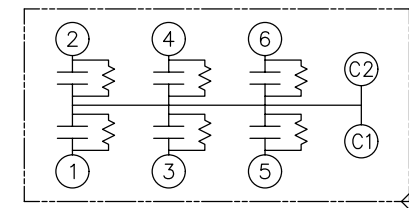

WITH INTERNAL DISCH RESISTORS
CAT. 19L0072WH3 SN
1800KVAR 3000V 1000HZ 1PH
6X5.3 UF/TAP
2.3 GAL. COMBUSTIBLE LIQUID
CAUTION! BEFORE INSTALLING OR
OPERATING READ GEH-2733
NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0072WH3	SHEET 2	CONT. ON	DISTR TO
	DRAWN E.McGINN ISSUED	DEC. 14, 2001	SCALE				