
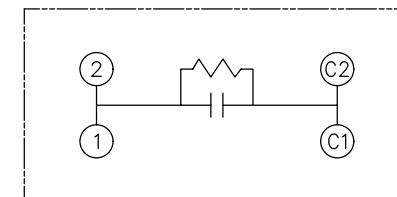


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

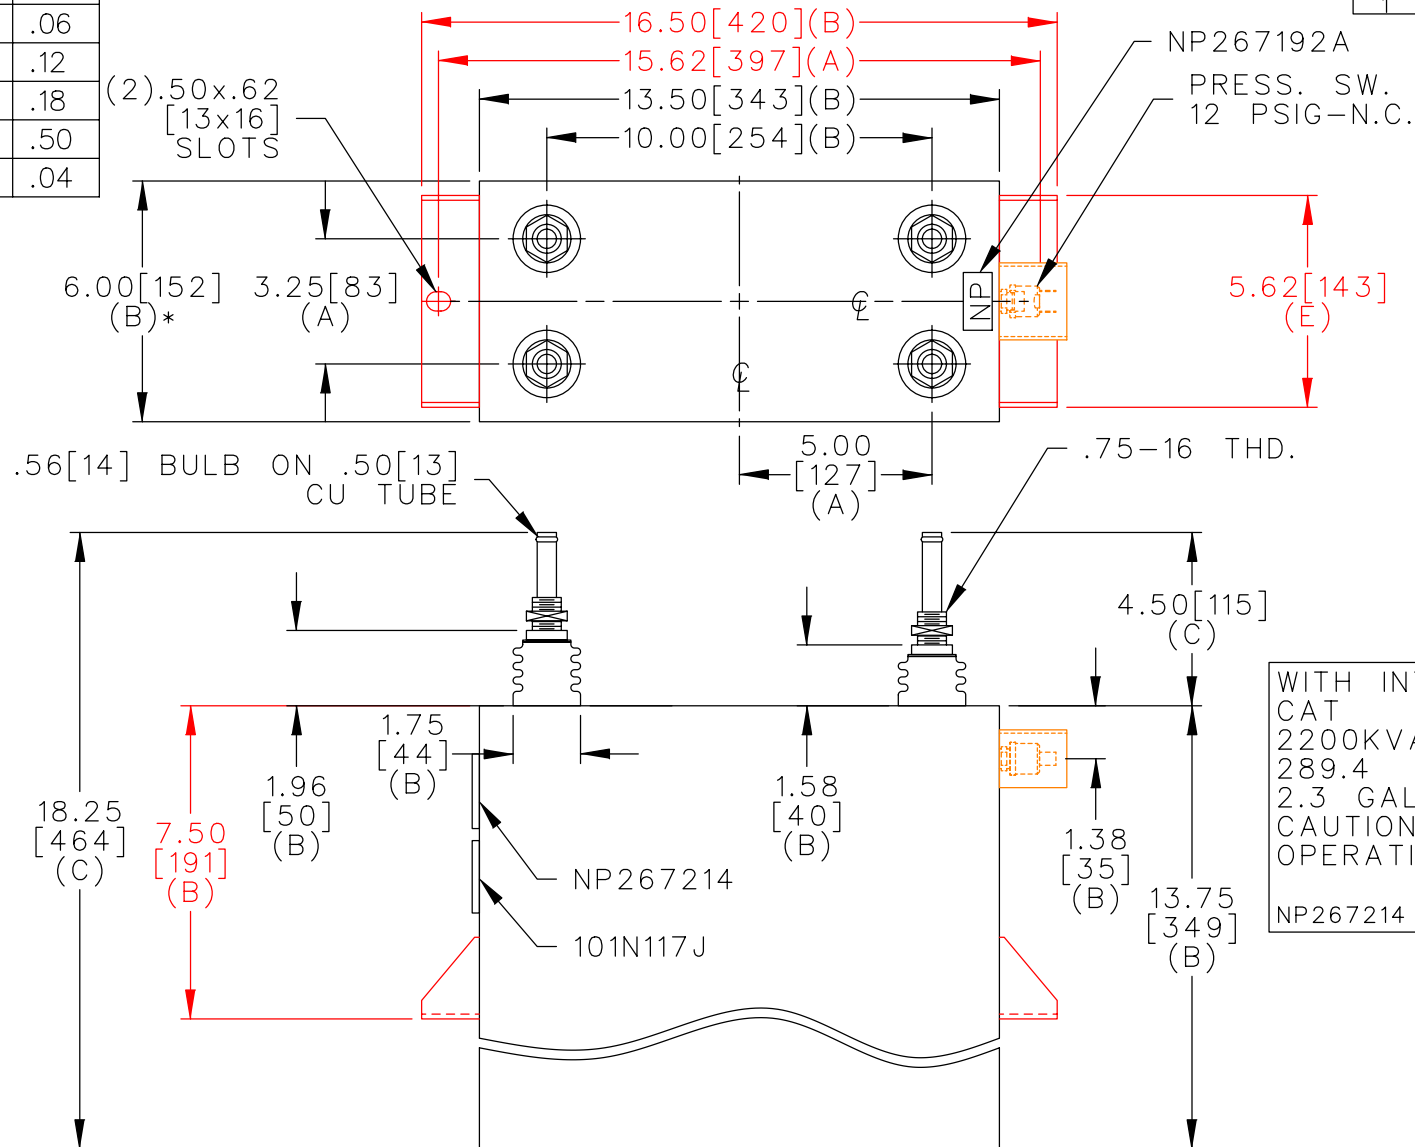

SCHEMATIC DIAGRAM - 107

WITH INTERNAL DISCH RESISTORS
 CAT 19L0095WH4 SN
 2200KVAR 1100V 1000HZ 1PH
 289.4 UF/TAP
 2.3 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.50 [13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 71 / 32 LB/KG	OUTLINE 19L0095WH4	
	DRAWN E.McGINN	MAR. 4, 1998				
ISSUED	3-11-98	SCALE			SHEET 2	CONT. ON 3

DISTR TO