

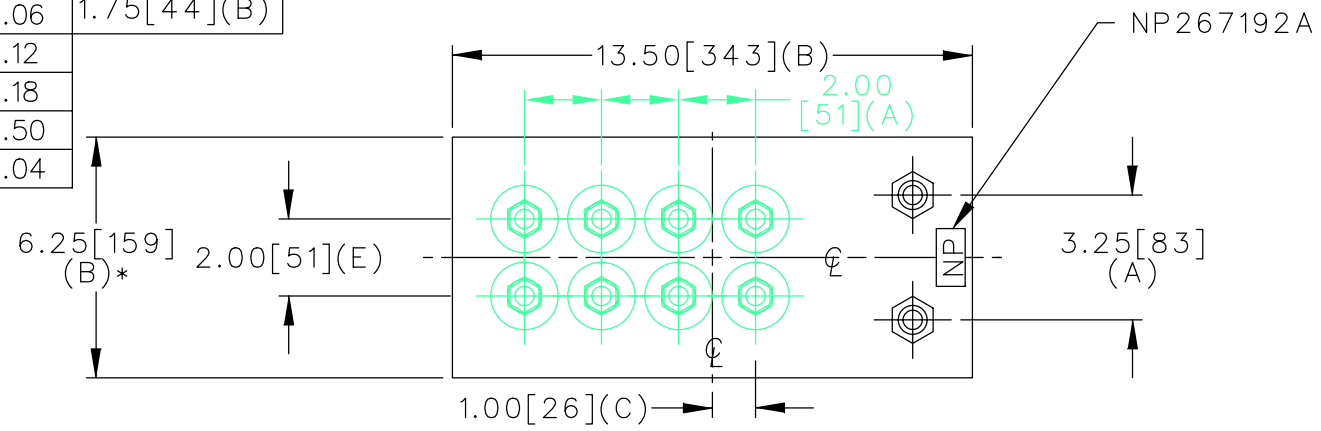


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

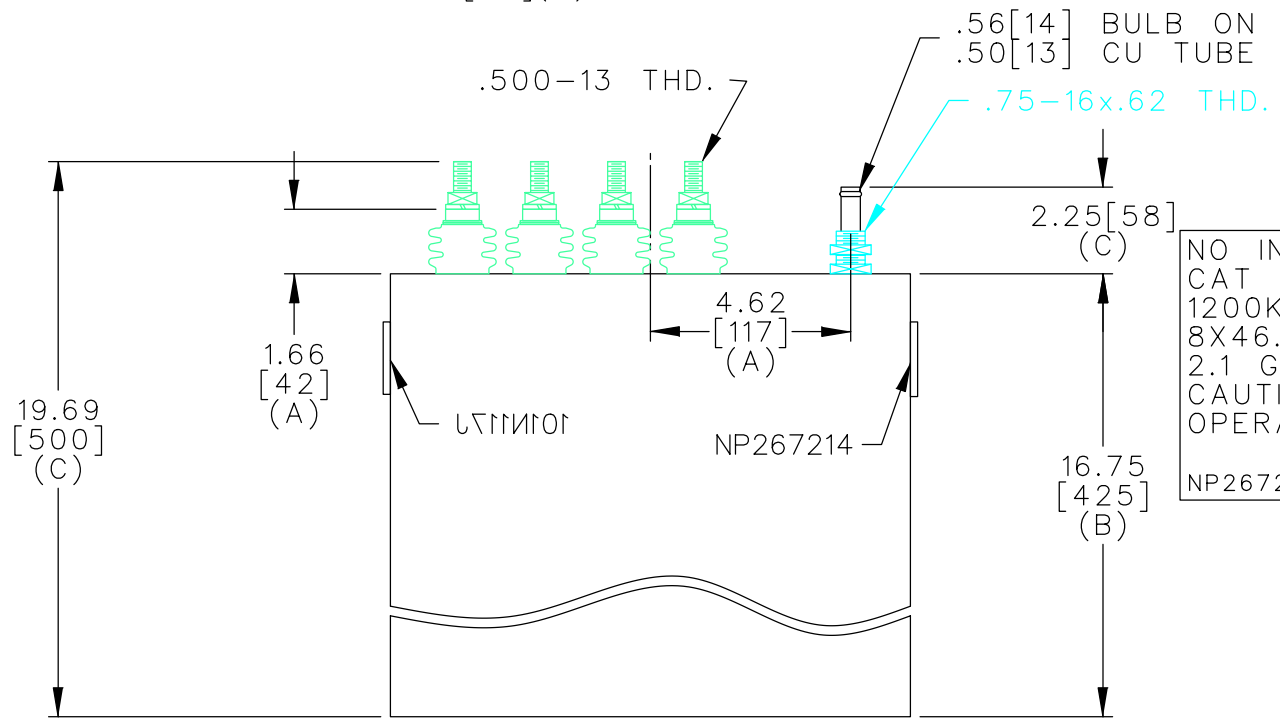

TERM	uF	kVAR
1	46.05	150
2	46.05	150
3	46.05	150
4	46.05	150
5	46.05	150
6	46.05	150
7	46.05	150
8	46.05	150

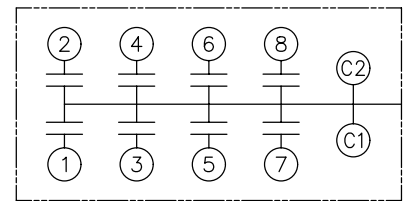

NO INTERNAL DISCH RESISTORS  
 CAT 19L0113WH1 SN  
 1200KVAR 720V 1000HZ 1PH  
 8X46.05 UF/TAP  
 2.1 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	UNIT WEIGHT 72 / 33 LB/KG	<b>OUTLINE</b> <b>19L0113WH1</b>	SHEET 2 CONT. 3	DISTR TO
	DRAWN E.McGINN	APR. 1, 1997	SCALE	NP267214			
ISSUED	4-2-97						