

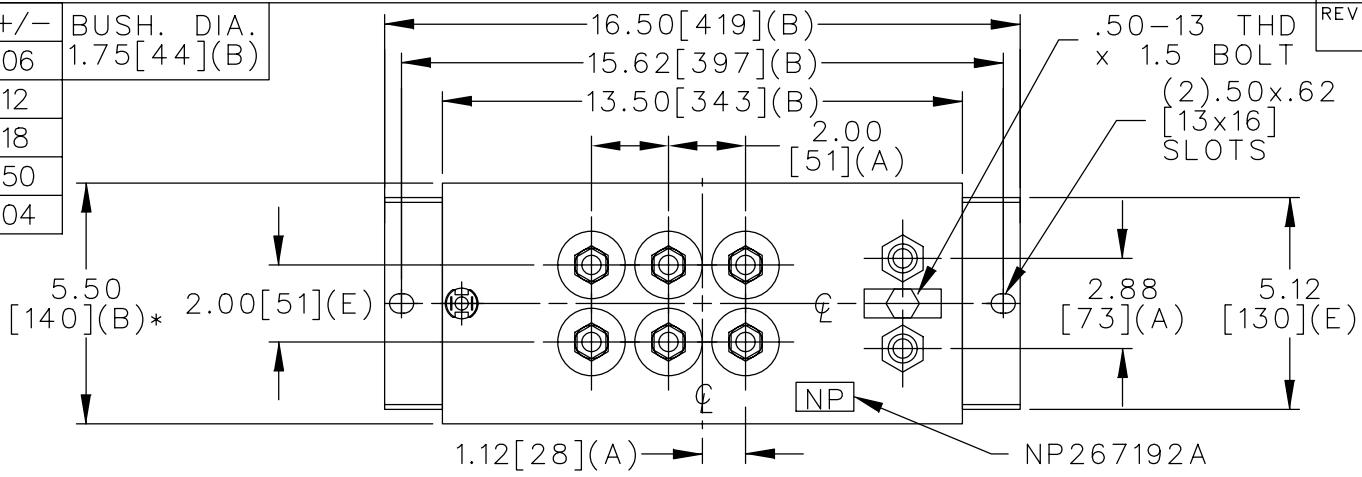


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

SIZE A DWG NO. 19L0128WH4 SH REV 1 DATE
 REV 1 MCGINN UPDATE CAT NO

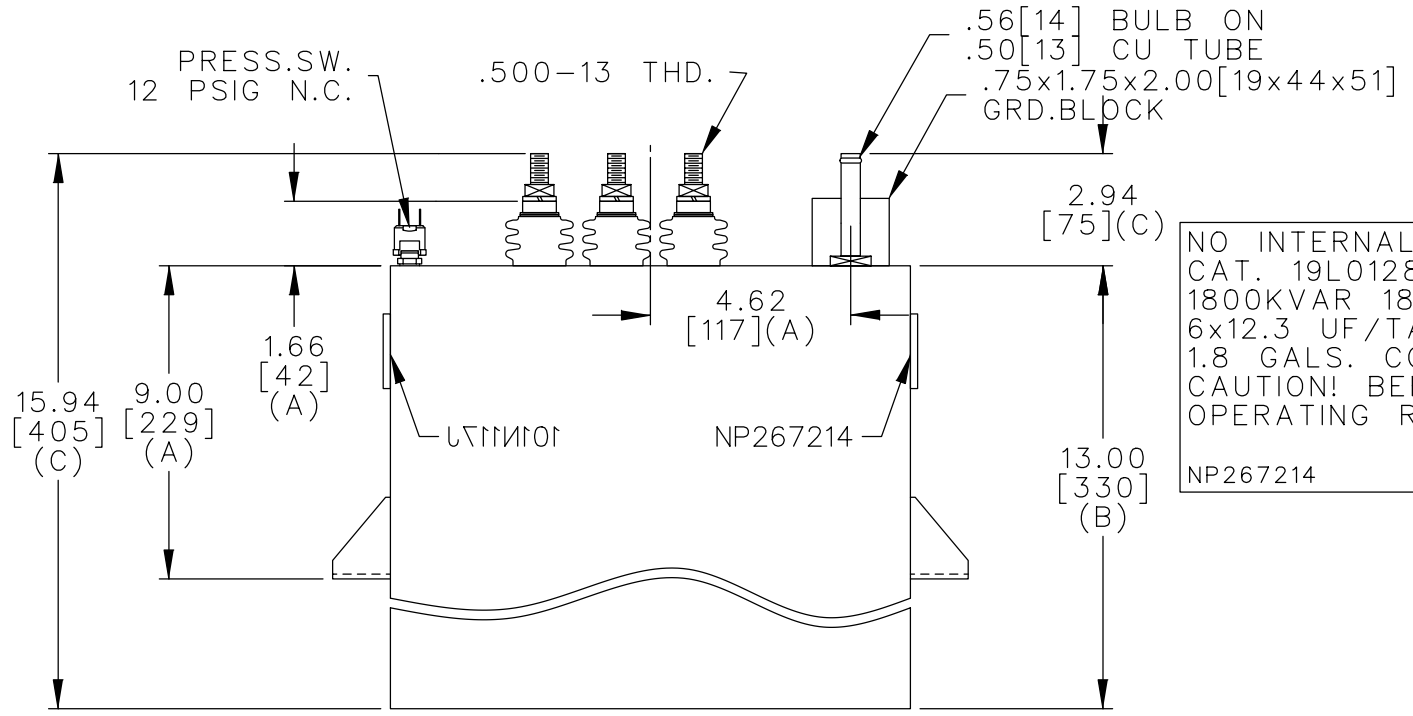

TERM	uF	kVAR
1	12.3	300
2	12.3	300
3	12.3	300
4	12.3	300
5	12.3	300
6	12.3	300

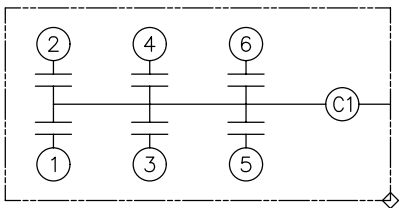

NO INTERNAL DISCH RESISTORS
 CAT. 19L0128WH4 SN
 1800KVAR 1800V 1200HZ 1PH
 6x12.3 UF/TAP
 1.8 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0128WH4		SHEET 2 CONT. ON -	DISTR TO
	DRAWN E.MCGINN	NOV. 18, 1996	SCALE				
ISSUED	11-20-96		SCALE				