



TOL	+/-	BUSH. DIA.
A	.06	1.75(B)
B	.12	
C	.18	
D	.50	
E	.04	

SIZE A	DWG NO. 19L0145WH1	SH	REV
REV 1	McGINN DEL SN ON (1) NP		

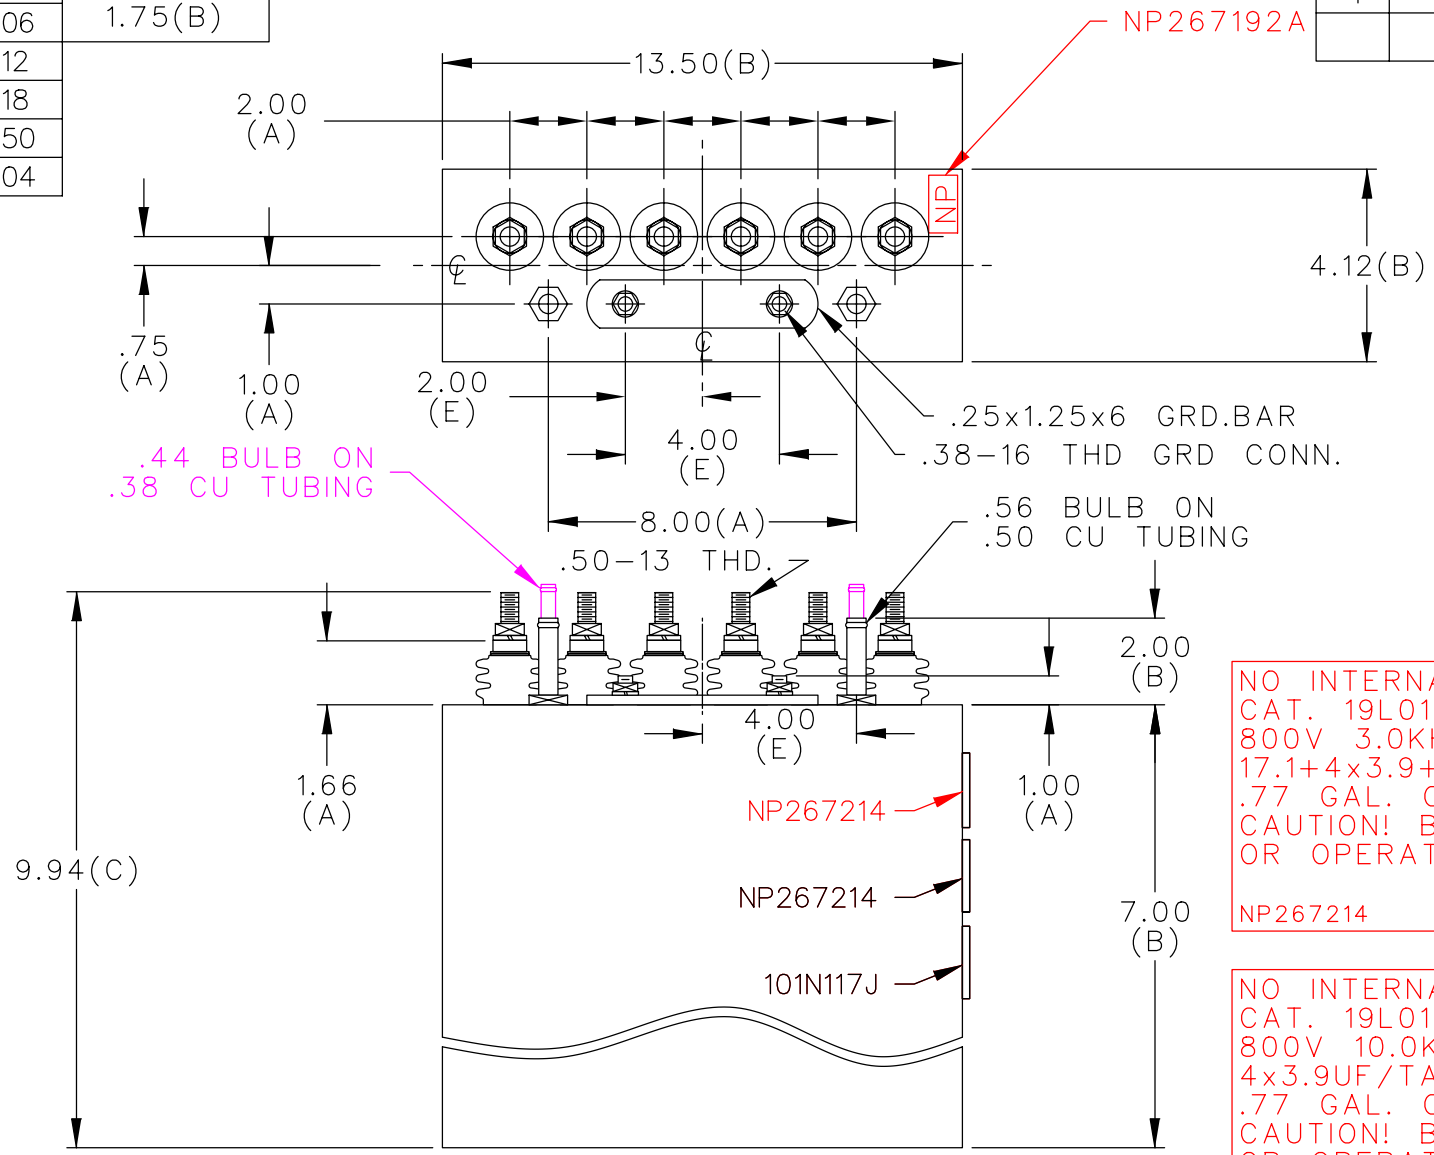

TERM	uF	kVAR
1	17.1	206.3
2	3.9	47.0
3	3.9	47.0
4	3.9	47.0
5	3.9	47.0
6	17.1	206.3

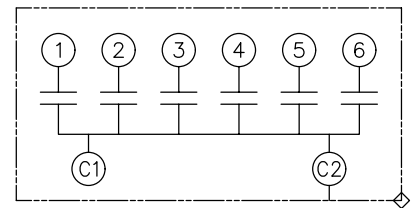

SCHMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0145WH1 SN
 800V 3.0KHZ 600KVAR 1PH
 17.1+4x3.9+17.1UF/TAP
 .77 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

NO INTERNAL DISCH RESISTORS
 CAT. 19L0145WH1
 800V 10.0KHZ 600KVAR 1PH
 4x3.9UF/TAP
 .77 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0145WH1	SHEET 2 CONT. ON -
	DRAWN E.McGinn	OCT. 20, 2000	SCALE		
ISSUED	10-25-00	DISTR TO			