



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

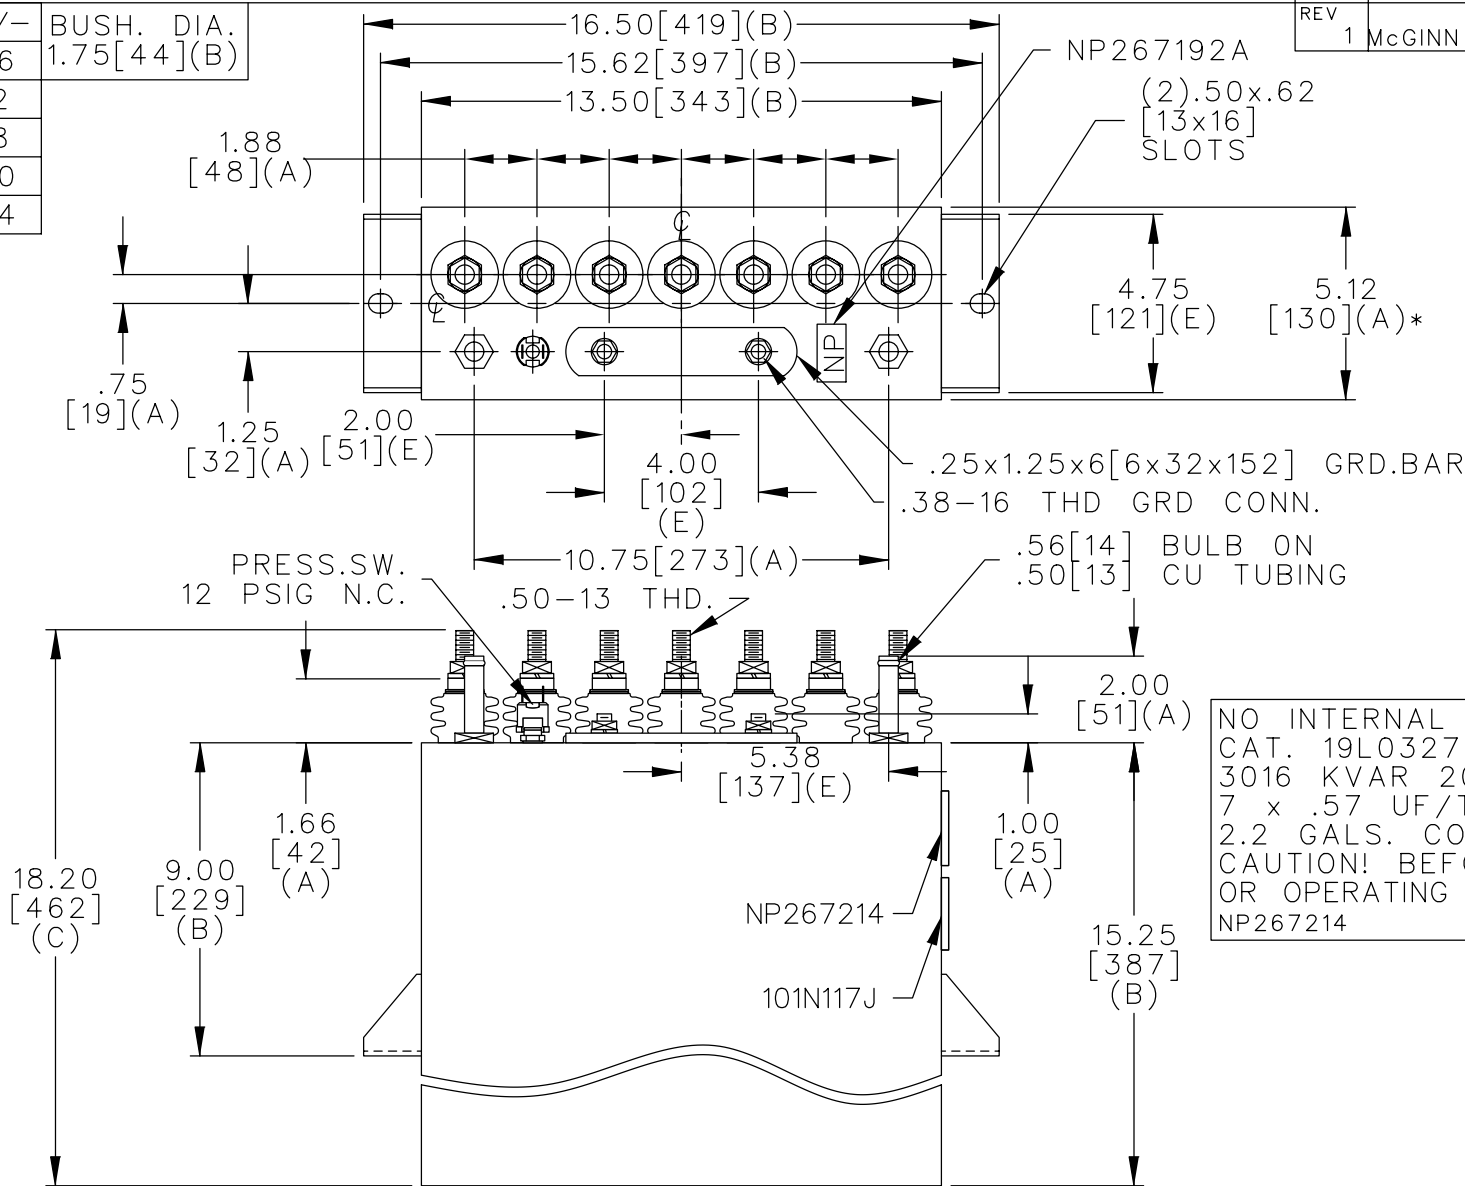

TERM	uF	kVAR
1	0.57	431
2	0.57	431
3	0.57	431
4	0.57	431
5	0.57	431
6	0.57	431
7	0.57	431

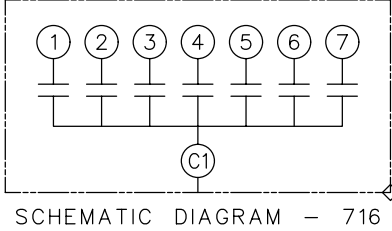

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0327WH4 SN  
 3016 KVAR 2000V 30000HZ 1PH  
 7 x .57 UF/TAP  
 2.2 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING  
 OR OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<b>OUTLINE</b> <b>19L0327WH4</b>	
	DRAWN E.McGINN	NOV. 21, 1996	SCALE		
ISSUED	12-4-96	SHEET	2	CONT.	-

DISTR TO