

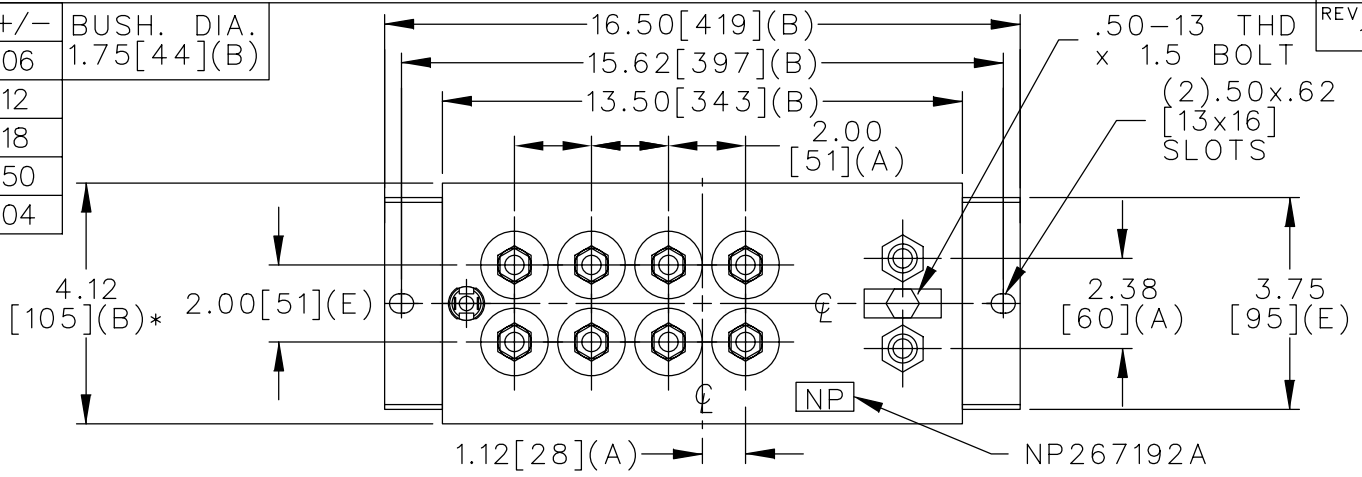


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

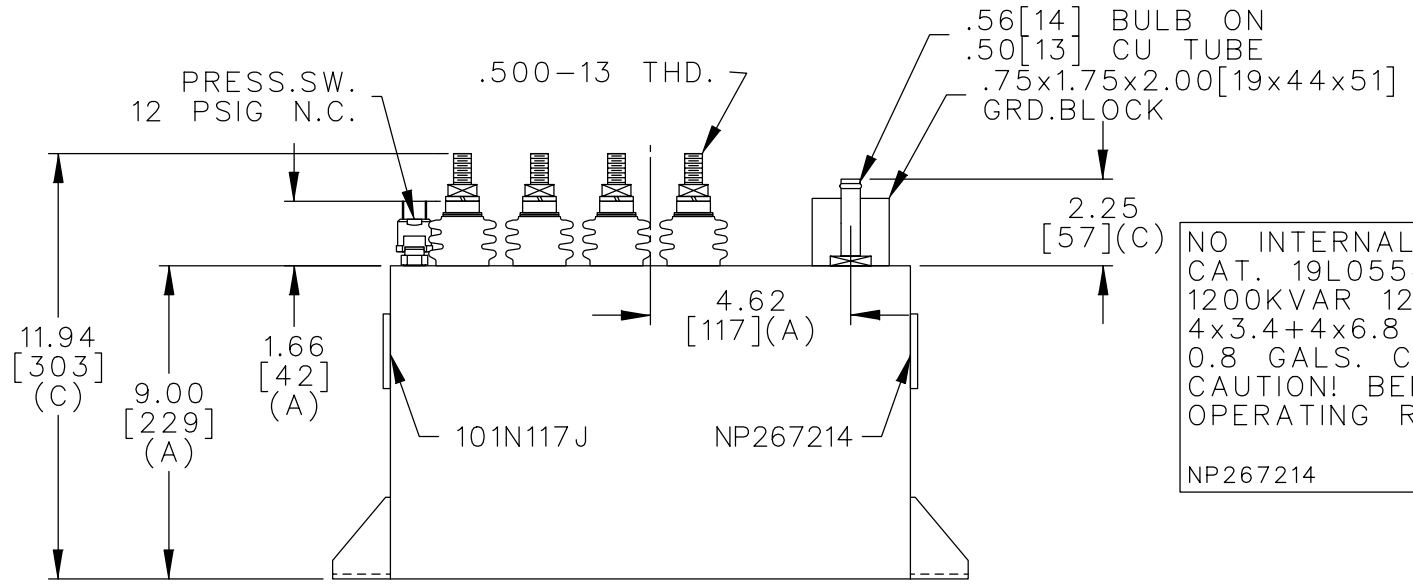

TERM	uF	kVAR
1	3.4	100
2	3.4	100
3	3.4	100
4	3.4	100
5	6.8	200
6	6.8	200
7	6.8	200
8	6.8	200

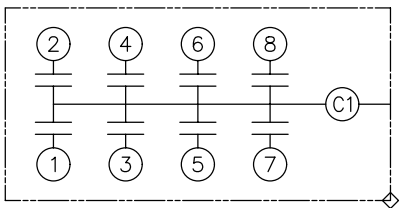

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0554WH4 SN  
 1200KVAR 1250V 3000HZ 1PH  
 4x3.4+4x6.8 UF/TAP  
 0.8 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	OUTLINE 19L0554WH4	
	DRAWN TMO	MAR 4, 1997	SCALE		
ISSUED	3-5-97	SHEET 2	CONT. ON -	DISTR TO	