




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

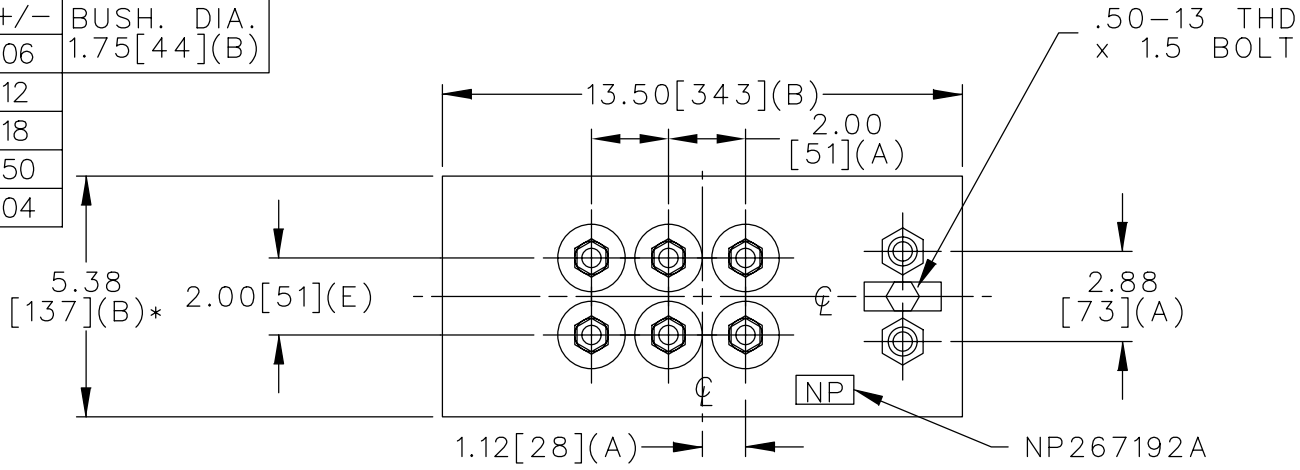

TERM	uF	kVAR
1	17	200
2	17	200
3	17	200
4	17	200
5	17	200
6	17	200

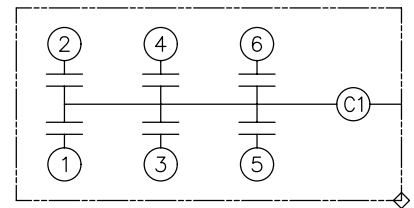

SCHEMATIC DIAGRAM - 606

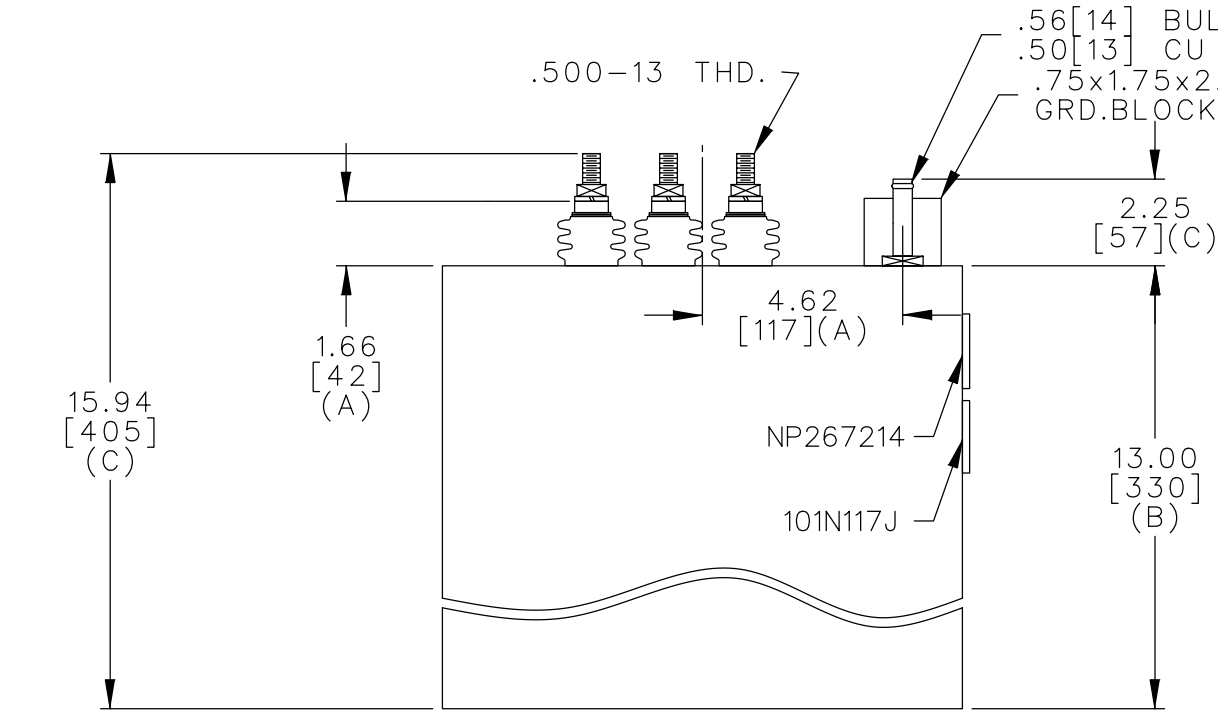

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0566WH1 SN  
 1200KVAR 1250V 1200HZ 1PH  
 6x17 UF/TAP  
 2.7 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<h1>OUTLINE</h1> <h2>19L0566WH1</h2>		SHEET 2	CONT. ON -
	DRAWN E.McGINN	JAN. 31, 1997	SCALE				
ISSUED	2-5-97		DISTR TO				