



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

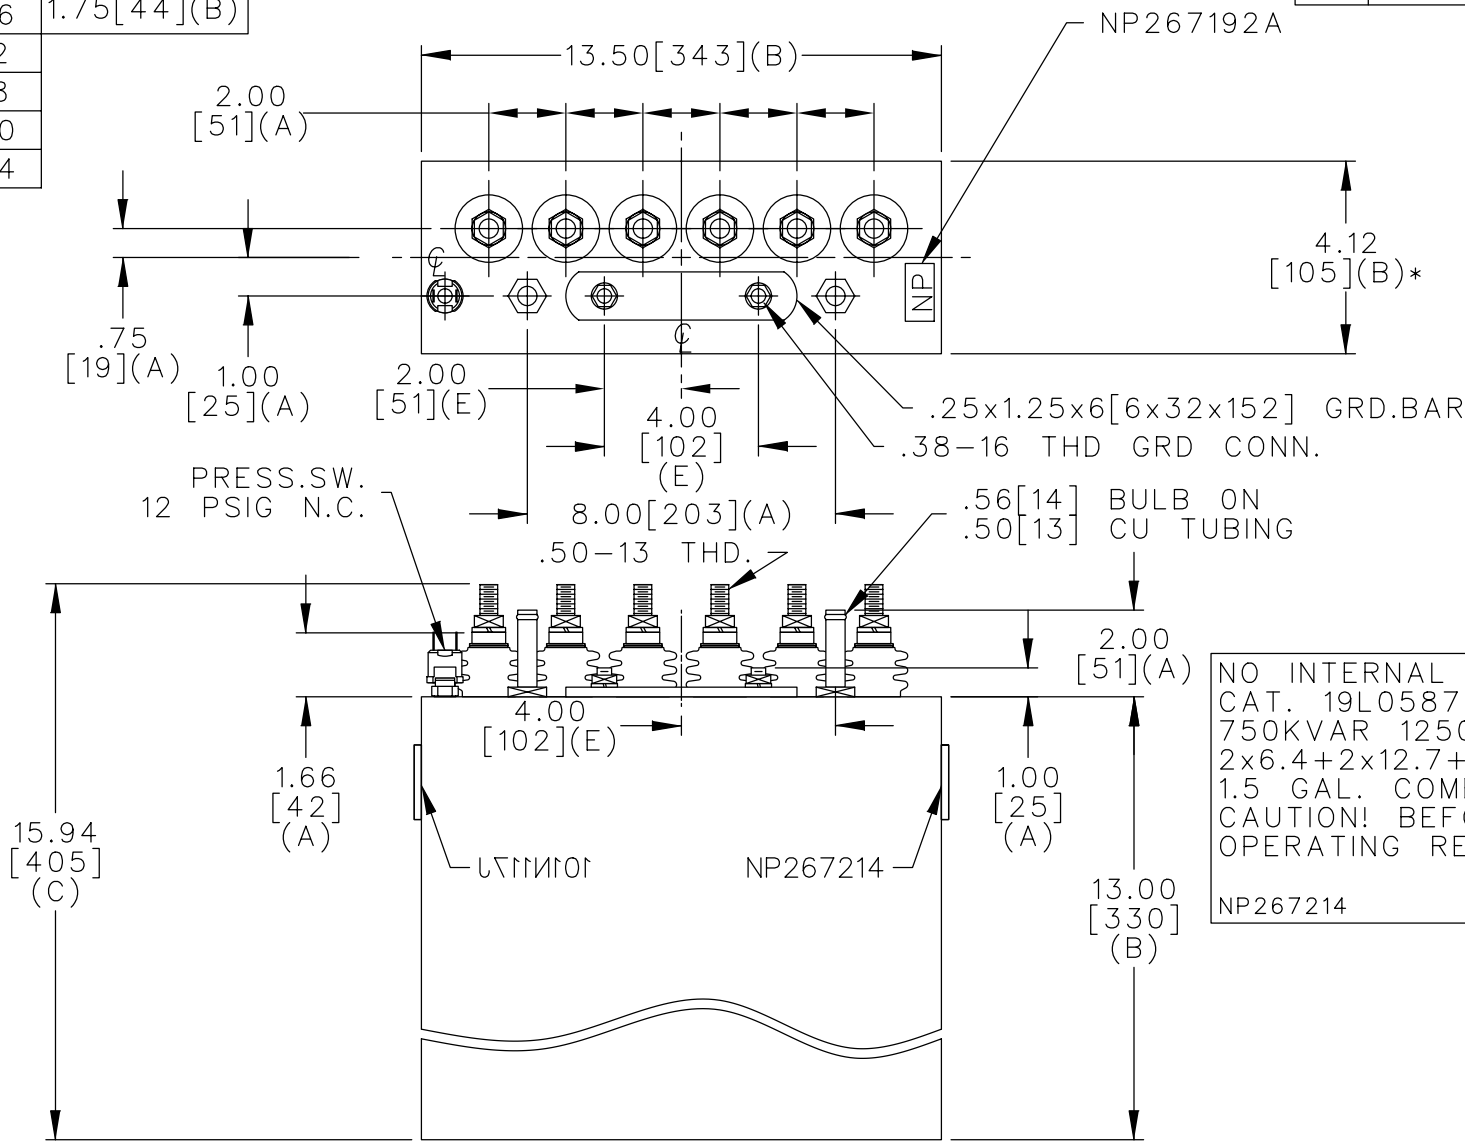

TERM	uF	kVAR
1	6.4	62.5
2	6.4	62.5
3	12.7	125
4	12.7	125
5	19.1	187.5
6	19.1	187.5

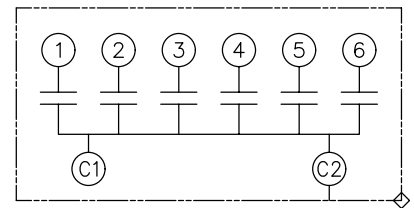

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0587WH2 SN  
 750KVAR 1250V 1000HZ 1PH  
 2x6.4+2x12.7+2x19.1UF/TAP  
 1.5 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	OUTLINE 19L0587WH2	SHEET 2 CONT. ON -
	DRAWN E.McGINN	JUNE 17, 1997	SCALE		
ISSUED				DISTR TO	