



19L0052WH1

TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

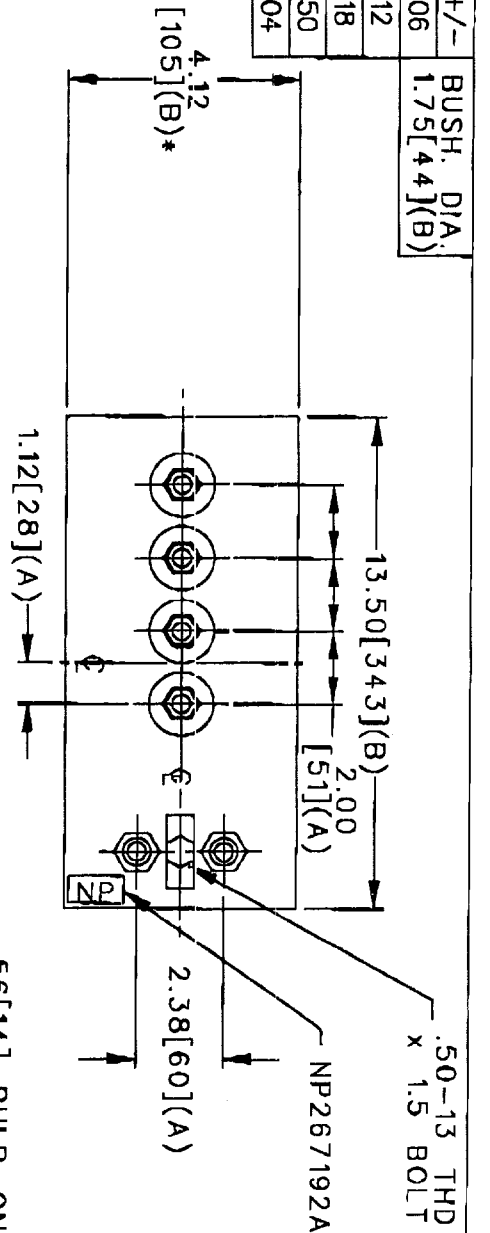


TERM	UF	KVAR
1	18.7	225
2	18.7	225
3	18.7	225
4	18.7	225

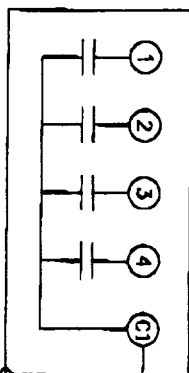

SCHEMATIC DIAGRAM - 401

NO INTERNAL DISCH RESISTORS
CAT. 19L0052WH1 SN
800KVAR 900V 3KHZ 1PH
4x18.7 UF/TAP
1.4 GALS. COMBUSTIBLE LIQUID
CAUTION! BEFORE INSTALLING OR
OPERATING READ GEH-2733
NP267214

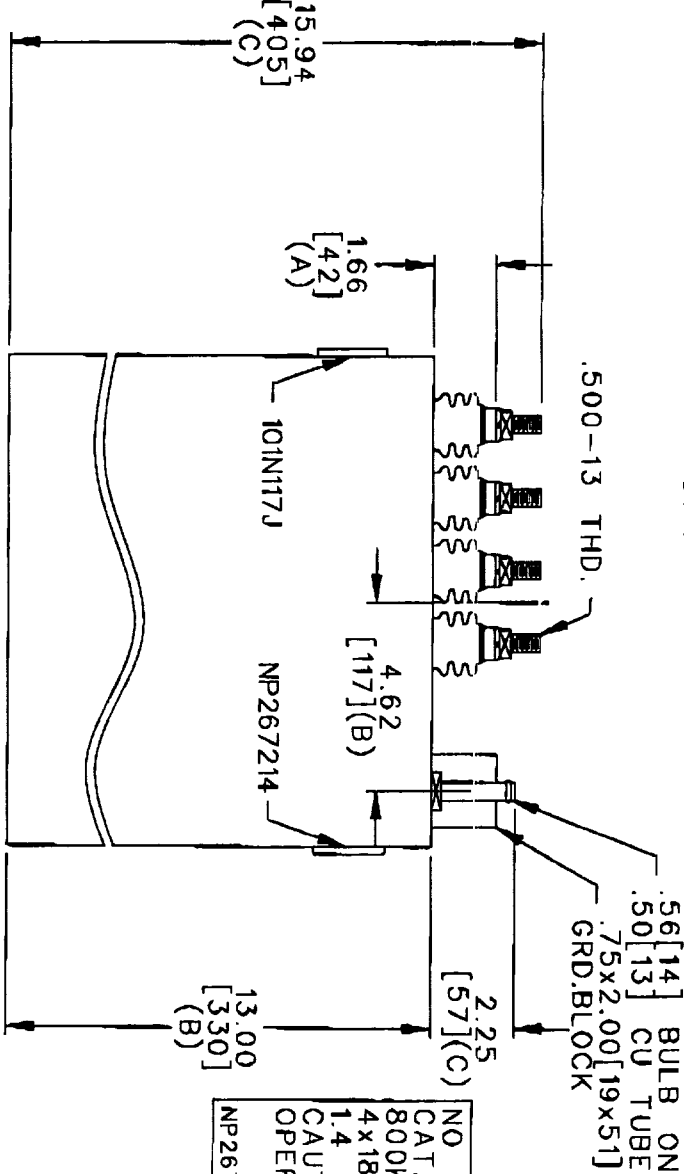

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A



CAPACITOR & POWER PROTECTION
FORT EDWARD, N.Y., U.S.A.

DRAWN E.MCGINN

JUNE 29, 2001

ISSUED

SIZE
A

SCALE

SHEET 2

CONT. -

OUTLINE
19L0052WH1

DISTR TO