


19L0519W

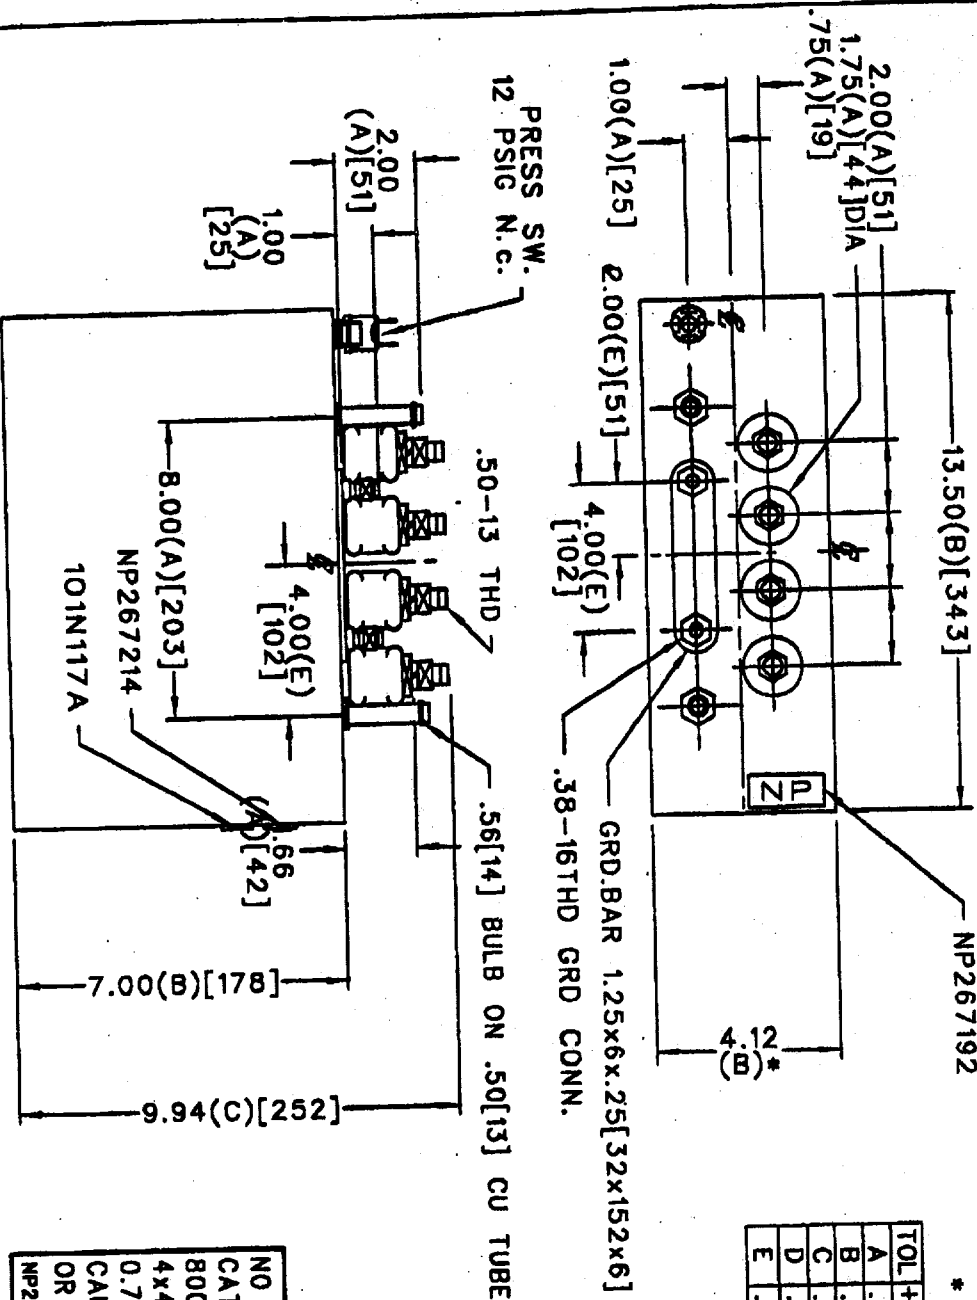

REV A 1-18-90 1920519W/2 SH 2 REV


REV 1 1-18-90 1920519W/2 SH 2 REV

REV 2 MCGINN ADD METRIC CHG SCHEM 12-1-93

TOL +/-	A	B	C	D	E
.06	.12	.18	.50	.04	

\* UP TO +.50 CASE BULGE

TERM	UF	KVAR
1	4.97	200
2	4.97	200
3	4.97	200
4	4.97	200



NO INTERNAL DISCH RESISTORS  
 CAT. 1920519W/2 SN  
 800KVAR 800V 10000HZ 1PH  
 4x4.97 UF/TAP  
 0.78 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING  
 OR OPERATING READ GEH-2733  
 NP267214

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT.-LBS  
 NP267192

CAPACITOR & POWER PROTECTION  
 FORT EDWARD, N.Y., U.S.A.

DRAWN E. MCGINN  
 JULY 14, 1986

ISSUED 1-18-90

SIZE A  
 SCALE

OUTLINE  
 1920519W/2

SHEET 2 CONT.  
 ON

DISTR TO

TO: FLOURDEL