







PRODUCT NUMBER	CAPACITY RANGE (pF)	VOLTAGE PEAK (kV)		CURRENT AMPS. (RMS) MAX.	INCHES LENGTH	NOM. DIMENSIONS		MILLIMETERS DIAM.	NUM. WEIGHT
		TEST	WORKING			DIAM.	LENGTH		
CKT-25-0035	25*	35	25	65	6.44	2.32 MAX.	163.58	58.93	1 lb. 6 oz.
CKT-50-0035	50*	35	25	75	6.44	2.32 MAX.	163.60	58.93	1 lb. 6 oz.
CKT-100-0035	100	35	25	85	6.44	2.32 MAX.	163.60	58.93	1 lb. 6 oz.
CKT-150-0030	150	30	20	90	6.44	2.66 MAX.	163.60	67.60	1 lb. 14 oz.
CKT-200-0030	200	30	20	95	6.44	2.66 MAX.	163.60	67.60	1 lb. 15 oz.
CKT-250-0030	250	30	20	100	6.44	2.66 MAX.	163.60	67.60	2 lb.

* Capacitance Tolerance ± 0.15 Note: Optional mounting flange FMOA available

CKT Series CKT-25

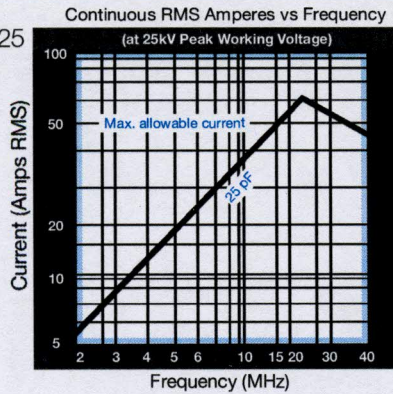

CKT-150

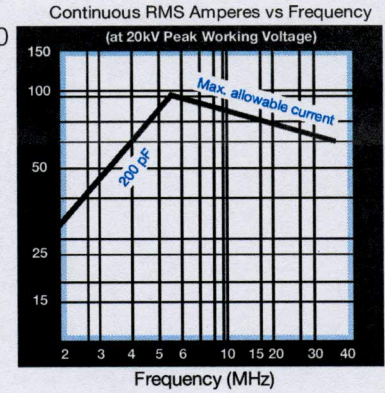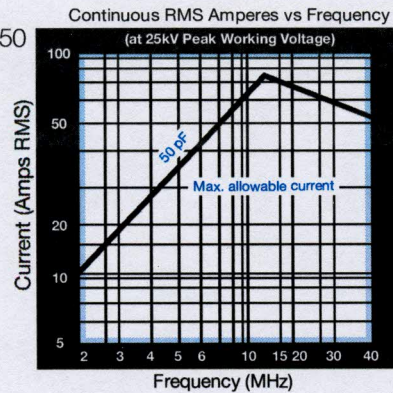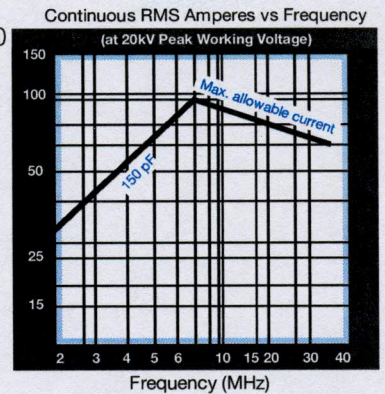


CKT-25
CKT-50
CKT-100

Mounting:
Use flange
FMOA on
both ends.

CKT-150
CKT-200
CKT-250

Mounting:
Use flange
FMOA on
both ends.

CKT-100

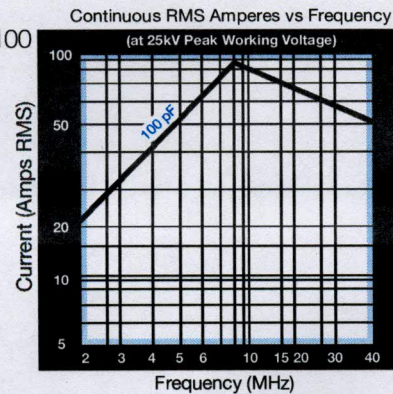

CKT-250

