
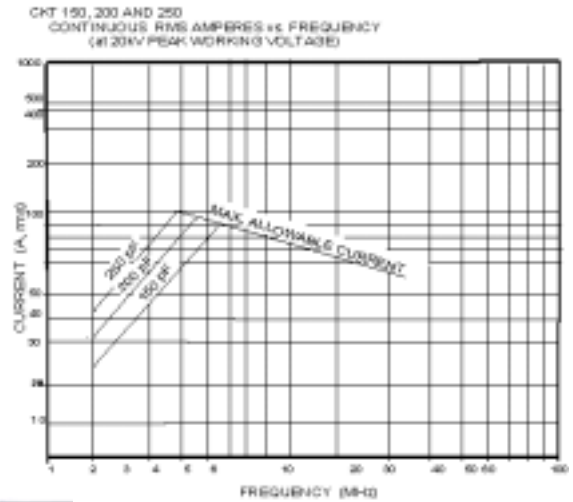


## CKT Series

Peak Test Voltage	Model Number	Capacity (pF) +0.15	Peak Working Volt. (kV)	AMPS (RMS) Max.	Nominal Dimensions				Type	Weight (NOM.)
					Inches		Millimeters			
					Length	Diameter**	Length	Diameter**		
30	CKT-150-0030	150*	20	90	6.5	2.66 MAX.	165.1	67.5 MAX.	C	1 lb. 14 oz.
30	CKT-200-0030	200*	20	95	6.5	2.66 MAX.	165.1	67.5 MAX.	C	1 lb. 15 oz.
30	CKT-250-0030	250*	20	100	6.5	2.66 MAX.	165.1	67.5 MAX.	C	2 lbs. 0 oz.
30	CKT-6-0035	6	25	47	6.5	2.32 MAX.	165.1	58.9 MAX.	C	1 lb. 6 oz.
35	CKT-12-0035	12	25	52	6.5	2.32 MAX.	165.1	58.9 MAX.	C	1 lb. 6 oz.
35	CKT-25-0035	25	25	67	6.5	2.32 MAX.	165.1	58.9 MAX.	C	1 lb. 6 oz.
35	CKT-50-0035	50	25	77	6.5	2.32 MAX.	165.1	58.9 MAX.	C	1 lb. 6 oz.
35	CKT-75-0035	75	25	82	6.5	2.32 MAX.	165.1	58.9 MAX.	C	1 lb. 6 oz.

\* Capacitance Tolerance  $\pm 5.0\%$

\*\* "A" Max

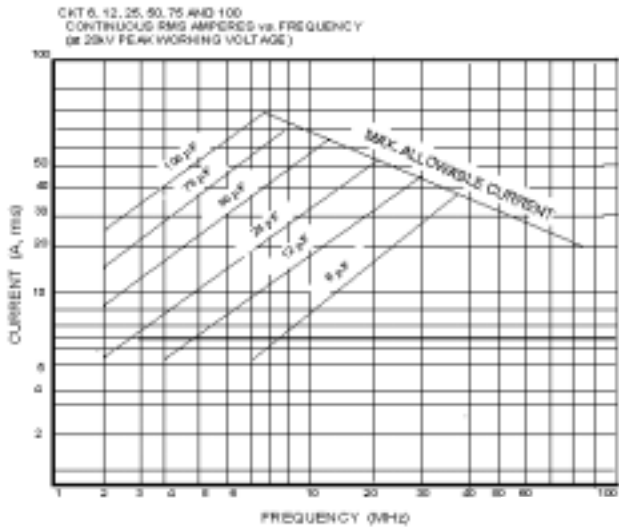

\*Optional Accessory: Mounting Flange FMOA available at extra cost.

