



JENNINGS Model Number	Capacity (pF) ± 10%	Voltage (kV) Peak		Current Amps (RMS) Max.	Type Ceramic or Glass	Nominal Dimensions				Weight (Nominal)
		Test	Working			Inches		Millimeters		
						Length	Diam.	Length	Diam.	
CY-1-25S	1.0*	25	15	7.0	C	3.25	0.77	82.55	19.56	2 oz.
CY-1-30S	1.0*	30	18	8.0	C	3.25	0.77	82.55	19.56	2 oz.
CY-2-25S	2.0*	25	15	8.0	C	3.25	0.77	82.55	19.56	2 oz.
CY-2-30S	2.0*	30	18	9.0	C	3.25	0.77	82.55	19.56	2 oz.
CY-3-25S	3.0*	25	15	9.0	C	3.25	0.77	82.55	19.56	2 oz.
CY-3-30S	3.0*	30	18	10	C	3.25	0.77	82.55	19.56	2 oz.
CY-5-25S	5.0	25	15	11	C	3.25	0.77	82.55	19.56	2 oz.
CY-5-30S	5.0	30	18	12	C	3.25	0.77	82.55	19.56	2 oz.
CLF1-6-0030	6.0	30	20	45	C	6.50	2.30	163.00	59.00	1 lb. 6 oz.
CLF1-6-0035	6.0	35	25	47	C	6.50	2.30	163.00	59.00	1 lb. 6 oz.

* ±0.5 pF


CY 1, 2, 3, 5




Mounting: Use Jennings No. 104277 Fuse clip.
Both ends.

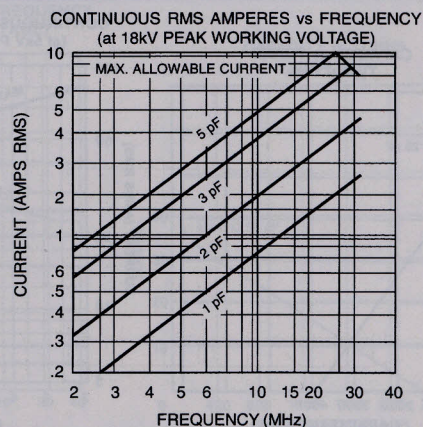

CLF1 6

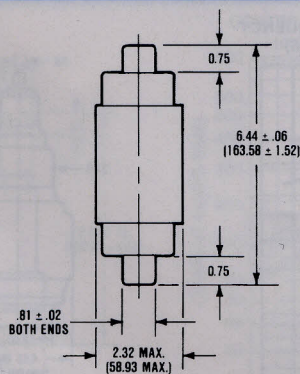

Mounting: Use flange FMOA on both ends.

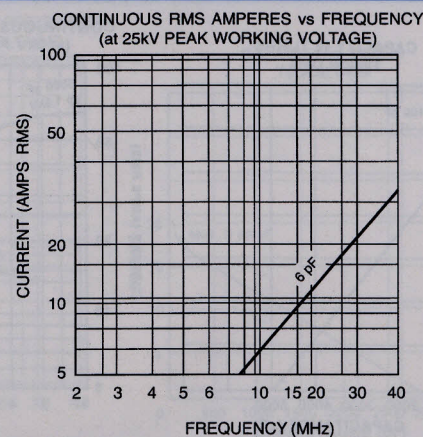

Jennings offers the broadest line of vacuum or gas capacitors available anywhere in the world. Our high voltage capacitors have unique capabilities making them particularly well-suited for high power oscillator and amplifier circuits.

